

PFC

PERSIAN FIBER COMMUNICATION CO.
TECHNICAL SPECIFICATION FOR DATA CABLE
SALE ENGINEERING DEPARTMENT

FIBER OFC-CT-SWA



WWW.PFCCO.NET

SPECIFICATION FOR DATA CABLE

FIBER

OFC-CT-SWA

Outdoor

- 1 GENERAL
- 2 OPTICAL FIBER
- 3 CABLE CONSTRUCTION
- 4 CABLE SIZES AND GENERAL DATAS
- 5 Transmission Distance Comparison
- 6 TOTAL SPECIFICATION

1- GENERAL

This specification covers in detail the optical, physical and mechanical characteristics of optical cables used in Outdoor application.

2- OPTICAL FIBER

2-1 – Optical Characteristics

The fibers may be standard single mode dispersion shifted (ITU-G652) and have the following table (1).

PARAMETERS (Maximum Individual)		UNIT	VALUE
Fiber Attenuation	1310nm	dB/km	<0.35
	1550nm	dB/km	<0.25
Temperature Variation Attenuation	-	dB/km	≤0.05
Point Discontinuities	1310/1550nm	dB	≤0.10
Water Peak Attenuation	1383±3	dB/km	See note
Attenuation Change vs. Wavelength	1285-1310	dB/km	≤0.10
	1525-1575	dB/km	≤0.05
Attenuation Change vs. Bending	100wraps/50mmdia	dB	≤0.5
	1wrap/32mmdia	dB	≤0.05
Zero Dispersion Wavelength	-	nm	1300-1324
Maximum Dispersion	1310nm	Ps/nm.Km	≤3.2
	1550nm	Ps/nm.Km	≤18.0
Zero Dispersion Slope	-	Ps/nm ² .Km	≤0.092
Nominal Mode Field Diameter	1310nm	μm	9.2±0.4
	1550nm	μm	10.4±0.8
Cable Fiber Cut-off Wavelength	(λ _{cc})	nm	<1260
Polarization Mode Dispersion	1310nm	Ps/√Km	<0.2
	1550nm	Ps/√Km	<0.2

The fibers will be MM Fiber 50/125 have the following properties table (2).
TABLE (2)

Item	Parameters		Unit	Value
2.1. OPTICAL CHARACTERISTICS				
2.1.1	Attenuation	@ 850 nm	dB/km	Max 2.4
		@ 1300 nm	dB/km	Max 0.6
2.1.2	Bandwidth	850 nm	MHz-km	Max 1500
		1300 nm@	MHz-km	Max 500
2.1.3	Point Discontinuity		dB	Max 0.1
2.1.4	Numerical Aperture		-	0.200 ± 0.015
2.2. DIMENSIONAL SPECIFICATION				
2.2.1	Core Diameter		µm	50 ± 2.5
2.2.2	Cladding Diameter		µm	125.0 ± 1.0
2.2.3	Coating Diameter		µm	245 ± 7
2.2.4	Core Non-Circularity		%	Max 5
2.2.5	Cladding Non-Circularity		%	Max 0.6
2.2.6	Core/Cladding Eccentricity		µm	Max 1
2.2.7	Coating/Cladding Eccentricity		µm	Max 10

2-2– Fiber and loose tube identification

Fibers in each loose tube and the tubes will be identified with the following table (3).

Fiber/Tube No.	Color	Fiber/Tube No.	Color
1	White	7	Brown
2	Red	8	Violet
3	Green	9	Orange
4	Blue	10	Pink
5	Yellow	11	Grey
6	Black	12	Natural

Note: For less than 12 core optical cables there should be first colors.

3 - CABLE CONSTRUCTION

Cable constructions are in accordance with the following table (4) and FIG. (1)

Subject	Description
3-1- Optical fiber	Single Mode fiber 9/125,Multimode fiber 50/125. The fibers are color coded and properly operate at a wide range of temperature from -60 °C up to +85 °C.
3-2- Buffer	Loose tubes of PBT materials, color coded, contains up to 12 optical fibers, filled with thixo tropic jelly. The jelly is free from dirt, metallic particles and would be non toxic and present no any dermal hazards.
3-3- strength member	A layer of Aramid yarn will be applied over the buffer. Swell able yarn may be applied over Aramid yarns.
3-4- Core	Loose tubes will be stranded around central strength member by SZ stranding method. For adapting the loose tubes to central element the fillers of HDPE may be used in cable construction.
3-5- Middle Layer	Corrugate Aluminium tape
3-6- Armor	Steel Wire Armored Filled with jelly
3-7- Outer jacket	A black HDPE jacket in according to will be applied on Aramid yarn. The nominal jacket thickness with 2mm.




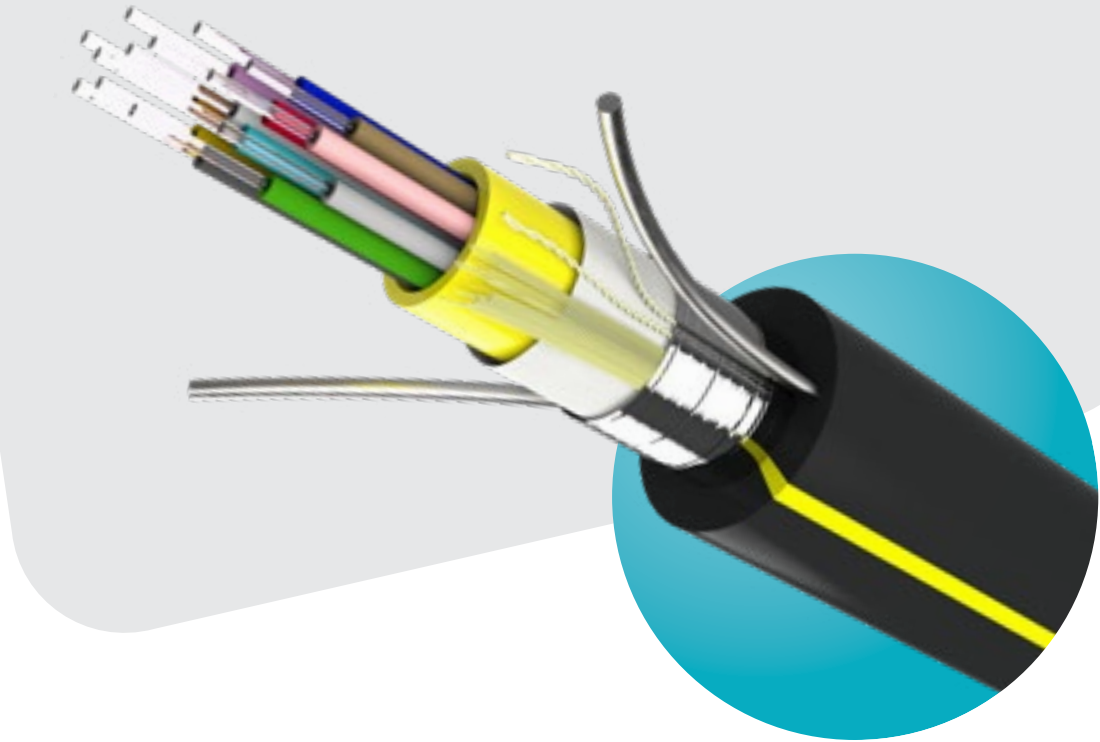


FIG (1)

The figure normally shows the general structure

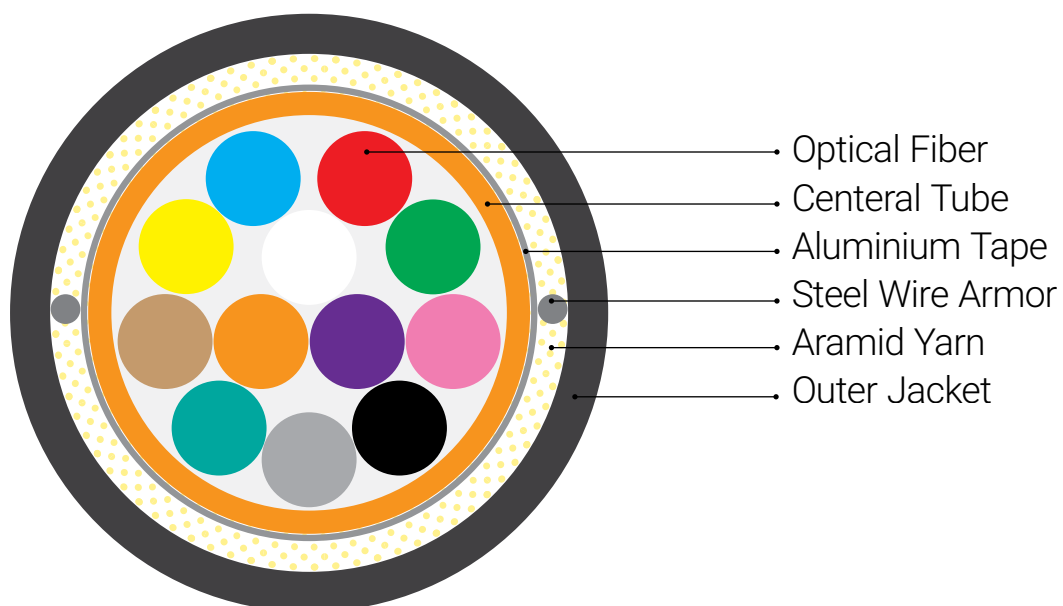

4 - CABLE SIZES AND GENERAL DATA'S

4-1 - CABLE SIZES AND GENERAL DATA

Cables size and general data are in accordance with the following table (5).

PARAMETERS		Description
Number of tubes		1
Fiber per tubes		12
Number of fibers		12
Central Strength Member(mm)		2.5
Pulling Tension (N)	Operation	2200
	Installation	3200
Overall diameter (mm)		12
Weight (Kg/km)		140

4-2 – IDENTIFICATION MARKING

Each length of the cable shall be permanently identified as to the manufacturer, year of manufacture, number of tubes, fiber per tubes and cable type. The marking will be printed on the outer jacket.

NOTE: Other method as request

5- Transmission Distance Comparison

Data Rate	Interface Type	Fiber Mode	Wavelength	Maximum Distance
1G	1000BASE	SM	1310nm	10km
		OM2	1300nm	550m
		OM3	1300nm	550m
10G	10GBASE	SM	1310nm	10km
		OM2	1300nm	220m
		OM3	1300nm	220m
40G	40GBASE	SM	1310nm	10km
		OM2	-	-
		OM3	850nm	100m
100G	100GBASE	SM	1310nm	10km
		OM2	-	-
		OM3	850nm	70m

6- Total specification

PARAMETERS	Description
Attenuation at 1550nm	Max 0.25
Attenuation at 1310nm	Max 0.35
Attenuation at 850nm	Max 2.4
Attenuation at 1300nm	Max 0.6
Fiber per tubes	1
Number of fibers	12
Middle Layer	CAT
Aarmor	SWA
Fiber Grade	SM: G.652.D MM: Bend Insensitive
Overall diameter (mm)	8
Fiber Type	OS2/ OM2/OM3
Structure	Loose Tube
Strength member	Aramid Yarn
Number of Jacket	Single Jacket
Cable Jacket	HDPE
Jacket Color	OS2/ OM2/OM3: Black
Application	Outdoor(Anti UV)
Marker Height (mm)	3.0 ± 0.3
Distance Marker(m)	1
Color	White
Packaging	Wooden Reel





شرکت پارسیان فیبر ارتباط

آدرس دفتر مرکزی: تهران
ضلع شمالی بزرگراه رسالت
نرسیده به خیابان استاد حسن بنا
پلاک-۱۱۴۷ کد پستی: ۱۶۷۱۶۱۷۸۱۳
شماره تماس ملی: ۱۵۲۸
تلفن فروش: ۰۲۱.۷۲۹۷۸۰۰۰